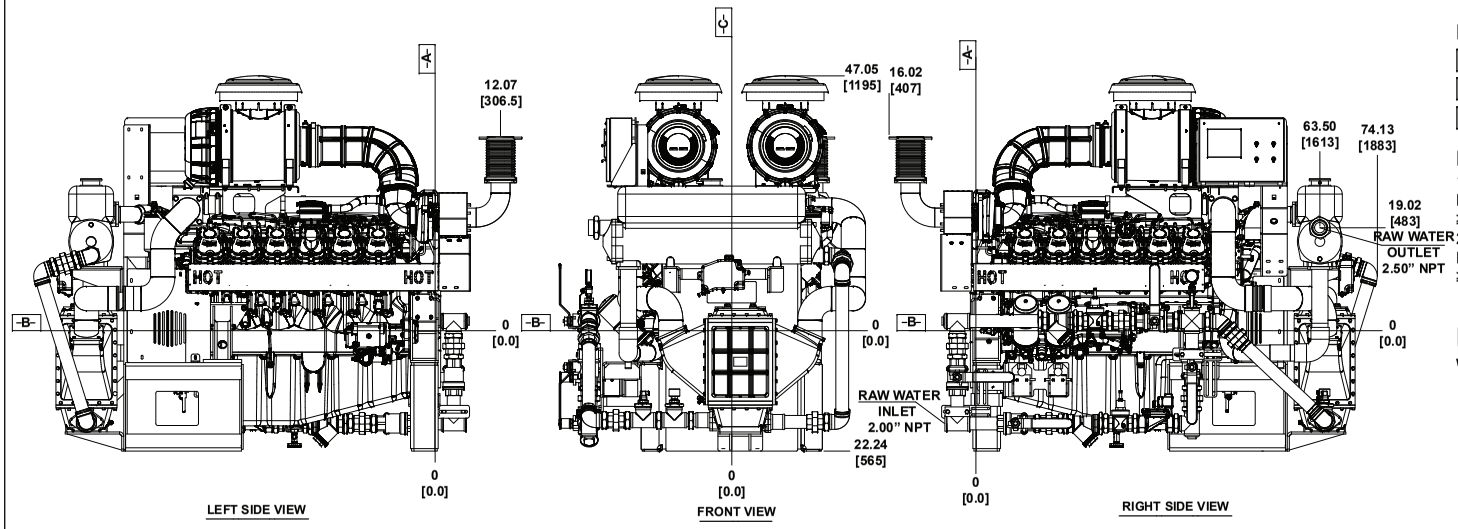


**DATUMS:**

- -A- — DIMENSIONAL FACE OF FLYWHEEL
- -B- — ENGINE HORIZONTAL CENTER (CRANKSHAFT)
- -C- — ENGINE VERTICAL CENTER (CRANKSHAFT)

**NOTES:**

1. FUEL SUPPLY PIPING MINIMUM INSIDE DIAMETER FROM TANK TO ENGINE MUST BE ≥ 0.512 [13].
2. FUEL RETURN PIPING MINIMUM INSIDE DIAMETER FROM TANK TO ENGINE MUST BE ≥ 0.512 [13].

**DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.**

**A - EXHAUST FLANGE X2 (4")**




**SCALE 2:1**










**FLYWHEEL HOUSING SAE #1**

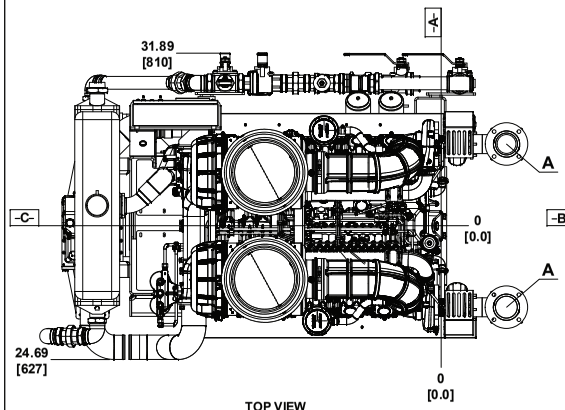


**FLYWHEEL 14.00**

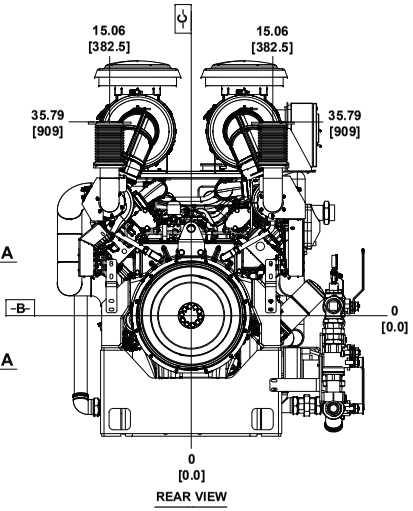


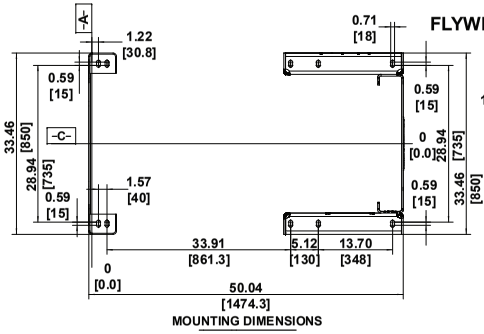**NOTES:**

1. ALL PLUMBING MUST BE SUPPORTED AND/OR ISOLATED SO THAT NO WEIGHT OR STRESS IS APPLIED TO ANY ENGINE COMPONENT.
2. REFER TO SPECIFIC MODELS' INSTALLATION, OPERATION & MAINTENANCE MANUAL FOR INSTALLATION GUIDELINES.

| REV | DESCRIPTION | DWN | APVD | DATE |
|---|---|---|---|---|
| | | | | |
| | | | | |
| | | | | |
| A | CREATION | MJF | | 09/01/2020 |

AMERIFLO

REV

UNITS IN[MM]

DRW BY: MJF DATE: 09/01/2020

CHK BY: DATE:

APPROVED: DATE:

NAME: INSTALLATION DRAWING DIESEL FIRE PUMP DRIVER MODEL AF12-128B

PART NO.: AF12-128B-00

MATERIAL:

PROJECTION:

PROJECT:

SCALE: NONE

PAGE 1 OF 1