


FM - APPROVED RATINGS BHP & KW

ENGINE MODEL:	AF6-159B
EMISSIONS:	TIER 0
DATE:	01/16/2021
DRAWING NUMBER:	AF6-159B.00
PERFORMANCE CURVE NUMBER:	C06159BF
RATED POWER:	778 BHP @ 1760 RPM 580 KW @ 1760 RPM
REFERENCE NUMBER:	14DS001E
VERSION:	A

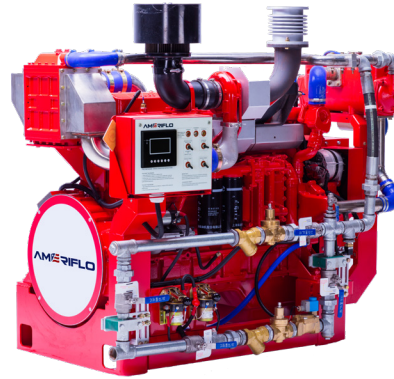

GENERAL ENGINE DATA

TYPE:	4 CYCLE; INLINE; WATER COOLED	
NUMBER OF CYLINDERS:	6	
ASPIRATION:	TURBOCHARGED + WATER COOLED	
BORE & STROKE - IN [MM]:	6.26 x 6.26 [159 x 159]	
CYLINDER LINER TYPE:	<input checked="" type="checkbox"/> WET <input type="checkbox"/> DRY	
DISPLACEMENT - IN ³ [L]:	1153 [18.90]	
COMPRESSION RATIO:	13.90:01	
FIRING ORDER:	1 - 5 - 3 - 6 - 2 - 4	
COMBUSTION SYSTEM:	DIRECT INJECTION	
ROTATION (AS VIEWED FROM FRONT OF ENGINE):	CCW	
VALVES PER CYLINDER:	INTAKE: 2 EXHAUST: 2	
VALVE LASH (COLD ENGINE):	INTAKE - IN [MM]:	0.014 [0.360]
	EXHAUST - IN [MM]:	0.027 [0.690]
IGNITION TYPE:	COMPRESSION (DIESEL)	
CHARGE AIR COOLING TYPE:	RAW WATER	
WEIGHT (FUEL PUMP CONFIGURATION) - LBS [KG]:	5456 [2475]	
DIMENSIONS (L x W x H) - IN [MM]:	89 x 54 x 76 [2250 x 1380 x 1935]	
FLYWHEEL / FLYWHEEL HOUSING DIMENSIONS:	14.00 / SAE #0	
TORQUE @ RATED RPM - LB-FT [N-M]:	2321 [3147]	

ENGINE PERFORMANCE DATA

ESTIMATED FREE FIELD SOUND PRESSURE LEVEL AT 3 FEET [1 METER] WITH FULL-LOAD GOVERNED SPEED (INCLUDES NOISE FROM EXHAUST, COOLING SYSTEM AND DRIVEN COMPONENTS)	dBa	≤ 108
ALL DATA IS BASED ON ENGINE OPERATING WITH FUEL SYSTEM, LUBRICATING OIL PUMP, AIR CLEANER AND ALTERNATOR. DOES NOT INCLUDE AIR COMPRESSOR, FAN & OPTIONAL EQUIPMENT. DATA IS BASED ON SAE STANDARD J1349 CONDITIONS AT 300 FEET [91.4 METERS] ALTITUDE, 29.61 INCHES [752 MILLIMETERS] HG DRY BAROMETER AND 77°F [25°C] INTAKE AIR TEMPERATURE USING #0 DIESEL FUEL FOLLOWING THE GB 252-2011 STANDARD.		
ALTITUDE ABOVE WHICH OUTPUT SHOULD BE DERATED:	FEET [METER]	300 [91]
DERATE PER 1,000 FEET [305 METERS] ABOVE ALTITUDE LIMIT:	3%	
TEMPERATURE ABOVE WHICH OUTPUT SHOULD BE DERATED:	°F [°C]	77 [25]
DERATE PER 10°F [5.6°C] ABOVE TEMPERATURE LIMIT:	1%	

● ALL DATA CERTIFIED WITHIN ±5%.

EXHAUST SYSTEM

EXHAUST GAS TEMPERATURE @ MAXIMUM RATING (POWER) - °F [°C]:	≤ 936 [502] @ 1760 RPM
EXHAUST GAS FLOW @ MAXIMUM OUTPUT - CFM [M ³ /HR]:	5649 [9265] @ 1760 RPM
MAXIMUM ALLOWABLE BACK PRESSURE - PSI [KPA]:	1.45 [10]
MINIMUM EXHAUST PIPE DIAMETER - IN [MM]:	8 [200]

AIR INTAKE SYSTEM

AIR CLEANER TYPE:	DRY TYPE, DISPOSABLE
AIR FLOW - CFM [M ³ /HR]:	2051 [3485] @ 1760 RPM
AIR INLET RESTRICTION - PSI [KPA]:	≤ 0.87 [6]

LUBRICATION SYSTEM

OIL CAPACITY (ENGINE ONLY) - QTS [L]:	40.2 [38]
MAXIMUM SUMP OIL TEMPERATURE - °F [°C]:	176 ~ 239 [80 ~ 248]
NORMAL OPERATING OIL PRESSURE RANGE - PSI [BAR]:	49.3 ~ 69.6 [3.4 ~ 4.8]
OIL PRESSURE @ IDLE - PSI [BAR]:	> 20.0 [1.38]

COOLING SYSTEM

COOLANT CAPACITY (ENGINE & HEAT EXCHANGER) - QTS [L]:	84.5 [80]	
THERMOSTAT RANGE:	START OPEN - °F [°C]:	180 [82]
	FULL OPEN - °F [°C]:	199 [93]
COOLANT PRESSURE MAXIMUM - PSI [BAR]:	13 [0.9]	
RAW WATER PRESSURE RANGE @ HEAT EXCHANGER - PSI [BAR]:	72.5 [5]	
ENGINE NORMAL OPERATING COOLANT TEMPERATURE - °F [°C]:	160 ~ 203 [71 ~ 95]	
RAW WATER COOLING FLOW RATE - GPM [M ³ /HR]:	198 [45]	
MINIMUM RAW WATER FLOW @ ENGINE SPEED (RPM)	1470	1760
RAW WATER TEMPERATURES TO 60.8°F [16°C] - GPM [M ³ /HR]:	66.0 [15.0]	74.8 [17.0]
RAW WATER TEMPERATURES TO 100.4°F [38°C] - GPM [M ³ /HR]:	78.4 [17.8]	95.1 [21.6]
RAW WATER INTAKE PIPE SIZE:	RAW WATER INLET - IN:	2.00 NPT
	RAW WATER OUTLET - IN:	2.50 NPT

HEATER SYSTEM

WATTAGE - W:	4500
VOLTAGE (AC) - V:	220

DC ELECTRICAL SYSTEM

NORMAL SYSTEM VOLTAGE - V:	24
STARTER MOTOR - HP [KW]:	12.7 [9.5]
RECOMMENDED BATTERY SIZE - AH:	200
COLD CRANKING AMPS @ 0°F (-18°C):	1000
CHARGING ALTERNATOR OUTPUT - AMPS:	35

① ALL DATA CERTIFIED WITHIN ±5%.

FUEL SYSTEM

INJECTION PUMP:	INLINE, PLUNGER TYPE
INJECTION PUMP ADVANCE ANGLE - °:	10.0
MINIMUM SUPPLY LINE SIZE - IN [MM]:	0.750 [19]
MINIMUM RETURN LINE SIZE - IN [MM]:	0.625 [16]
FUEL MANAGEMENT CONTROL:	MECHANICAL
IDLE SPEED - RPM:	675
GOVERNED SPEED RATE - %:	< 10

① ALL DATA CERTIFIED WITHIN ±5%.



ENGINE MATERIALS & CONSTRUCTION

ENGINE		AIR INTAKE	
CAMSHAFT:		AIR CLEANER:	
TYPE	OVERHEAD	TYPE	DRIP PROOF
MATERIAL	CARBON STEEL	MATERIAL	PLEATED PAPER
LOCATION	IN BLOCK	COOLING SYSTEM	
DRIVE	SPUR GEAR	COOLANT HEAT EXCHANGER:	
CONNECTING RODS:		TYPE	TUBE & SHELL
TYPE	I-BEAM, FRACTURE	MATERIAL	
MATERIAL	FORGED STEEL	ELECTRODE	ZINC
CRANKSHAFT:		HEADERS	ALUMINUM
TYPE	GROUND	SHELL	ALUMINUM
MATERIAL	DUCTILE IRON	TUBES	COPPER
MAIN BEARINGS:		COOLANT PUMP:	
TYPE	PRECISION, HALF SHELL	TYPE	CENTRIFUGAL
MATERIAL	TIM ALUMINUM ALLOY	DRIVE	V-BELT
CYLINDER BLOCK:		THERMOSTAT:	
TYPE	GANTRY	TYPE	NON-BLOCKING
MATERIAL	CAST IRON	QUANTITY	1
CYLINDER HEAD:		COOLING LOOP (GALVANIZED):	
TYPE	ONE PIECE	TEES, ELBOWS, PIPE	GALVANIZED STEEL
MATERIAL	CAST IRON	BALL VALVES	BRASS
CYLINDER LINERS:		SOLENOID VALVE	BRASS
TYPE	WET LINED	PRESSURE REGULATOR	BRASS
MATERIAL	CAST IRON ALLOY	STRAINER	BRASS
PISTONS:		COOLING LOOP (316 STAINLESS STEEL):	
TYPE	TRUNK	TEES, ELBOWS, PIPE	316 STAINLESS STEEL
MATERIAL	ALUMINUM ALLOY	BALL VALVES	316 STAINLESS STEEL
PISTON PINS:		SOLENOID VALVE	316 STAINLESS STEEL
TYPE	FULL FLOATING	PRESSURE REGULATOR	316 STAINLESS STEEL
MATERIAL	ALLOY STEEL	STRAINER	316 STAINLESS STEEL
PISTON RINGS:		FUEL SYSTEM	
FIRST	DUCTILE CAST IRON	FUEL INJECTION PUMP:	
SECOND	ALLOY CAST IRON	TYPE	FULL MECHANICAL, CENTRIFUGAL
THIRD	ALLOY CAST IRON	DRIVE	GEAR DRIVEN
VALVES:		LUBRICATION SYSTEM	
TYPE	POPPET	TYPE	GEROTOR
ARRANGEMENT	OVERHEAD	DRIVE	GEAR
VALVE # PER CYLINDER	1 INTAKE, 1 EXHAUST		
OPERATING MECHANISM	MECHANICAL ROCKER ARM		
LIFTER TYPE	LARGE HEAD		


SPARE PARTS LIST

PART DESCRIPTION	PART NUMBER	REMARKS
AFTERCOOLER	AF1500073926	KL19
HEAT EXCHANGER	AFC900ZZ-HE	MAX. WORKING PRESSURE 72.5 PSI [5 BAR]
ALTERNATOR	3016627	28 V / 35 A
STARTING SYSTEM	4296454	24 V / 9.5 KW
TURBOCHARGER	HX80	3594118
FUEL PUMP WITH SPEED CONTROLLER	4296019	N/A
FUEL INJECTORS	3095773	0.16 MM
CONTROLLER	AF.ENG.AB-ETS-R-B	N/A
BATTERY	908DFT	12 V / 200 AH
EMERGENCY STARTERS	535-0098	24 VDC 800 A
OIL PRESSURE SENSOR	KE21103	11.6 ± 4.35 PSI [80 ± 30 KPA]
HIGH TEMPERATURE COOLANT SENSOR	KE00108	203 ± 37 °F [95 ± 3°C]
LOW COOLANT TEMPERATURE SENSOR	KE00108	104 ± 37 °F [40 ± 3°C]
HIGH TEMPERATURE RAW WATER SENSOR	204.040.15GO.1.IP65	104 ± 37 °F [40 ± 3°C]
FLOW SENSOR	WK150B	N/A
OVERSPEED SHUTDOWN DEVICE	YC-ENL-A0	N/A
SPEED SENSOR	3034572	N/A
ENGINE HEATER	FH220450065	220 V / 4.5 KW MAX. TEMP 149°F [65°C]
	SH110200065	220 V / 2 KW MAX. TEMP 149°F [65°C] WITH PUMP
	SH110200065	110 V / 2 KW MAX. TEMP 149°F [65°C] WITHOUT PUMP
OIL FILTERS	3401544	2 PIECES
FUEL FILTERS	3315847	2 PIECES
AIR FILTERS	4913882	1 PIECE
BELTS	5412987	1 PIECE
THERMOSTATS	3076489	1 PIECE
EXHAUST BLANKET	AFKTA190801-EI	DN80
FUEL SUPPLY & RETURN LINES	AF6-KTA19-11.01 AF6-KTA19-11.02	N/A

POWER CURVE

CURVE NUMBER:	C06159BF	DATE:	01/16/2021
DISPLACEMENT - IN ³ [L]:	1153 [18.90]	ASPIRATION:	TURBOCHARGED + WATER COOLED
POWER STANDARD:	UL	BORE & STROKE - IN [MM]:	6.26 x 6.26 [159 x 159]
NUMBER OF CYLINDERS:	6	FUEL SYSTEM:	INLINE, MECHANICAL

● ALL DATA CERTIFIED WITHIN ±5%.

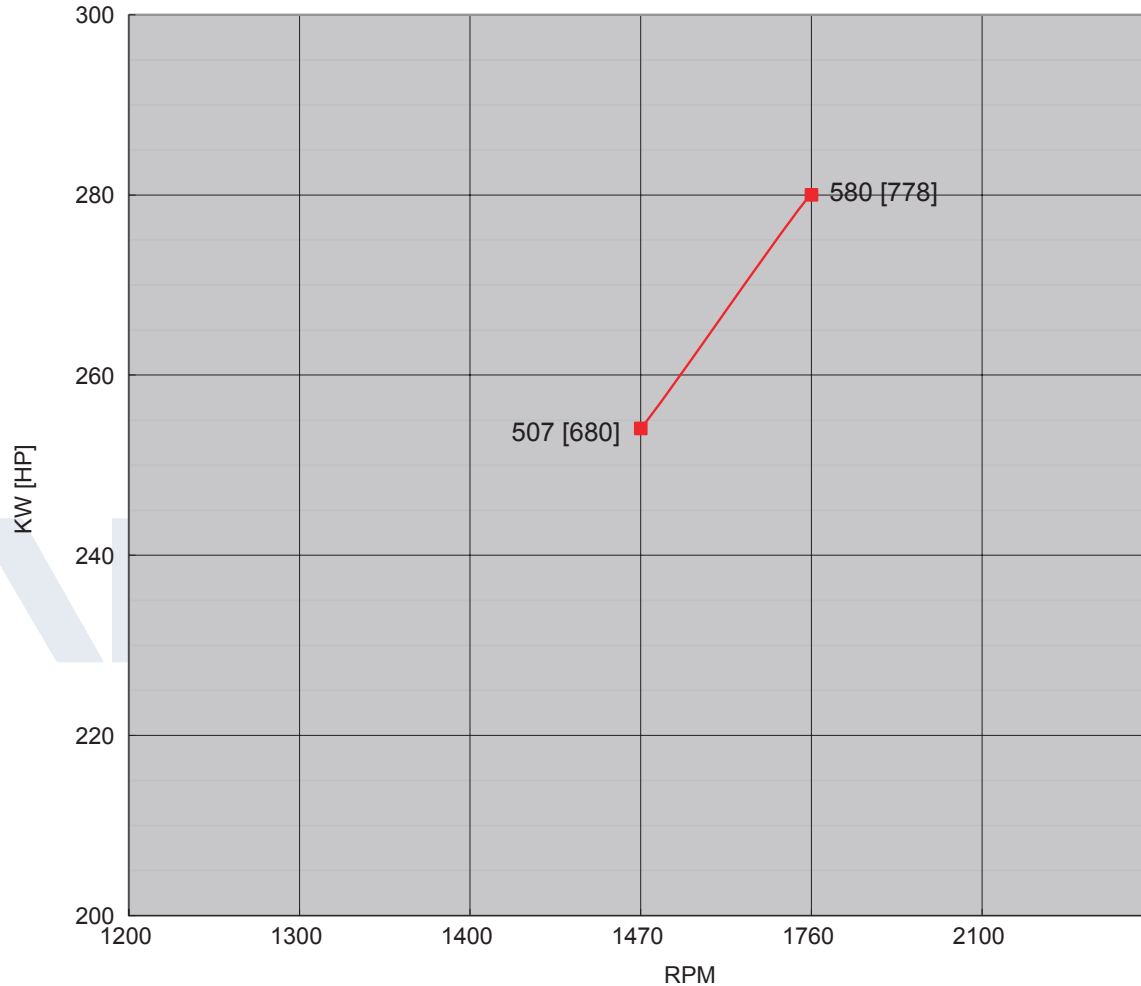


TORQUE		
SPEED	LB-FT	N-M
RPM		
1150		
1470	2430	3296
1760	2321	3147
2100		

OUTPUT POWER		
SPEED	HP	KW
RPM		
1150		
1470	680	507
1760	778	580
2100		

FUEL CONSUMPTION		
SPEED	LB/BHP-HR	G/KW-HR
RPM		
1150		
1470	0.345	210
1760	0.350	213
2100		

● ALL DATA IS BASED ON ENGINE OPERATING WITH FUEL SYSTEM, LUBRICATING OIL PUMP, AIR CLEANER AND ALTERNATOR. DOES NOT INCLUDE AIR COMPRESSOR, FAN & OPTIONAL EQUIPMENT. DATA IS BASED ON SAE STANDARD J1394 CONDITIONS AT 300 FEET [91.4 METERS] ALTITUDE, 29.61 INCHES [752 MILLIMETERS] HG DRY BAROMETER AND 77°F [25°C] INTAKE AIR TEMPERATURE USING #0 DIESEL FUEL FOLLOWING THE GB 252-2011 STANDARD.

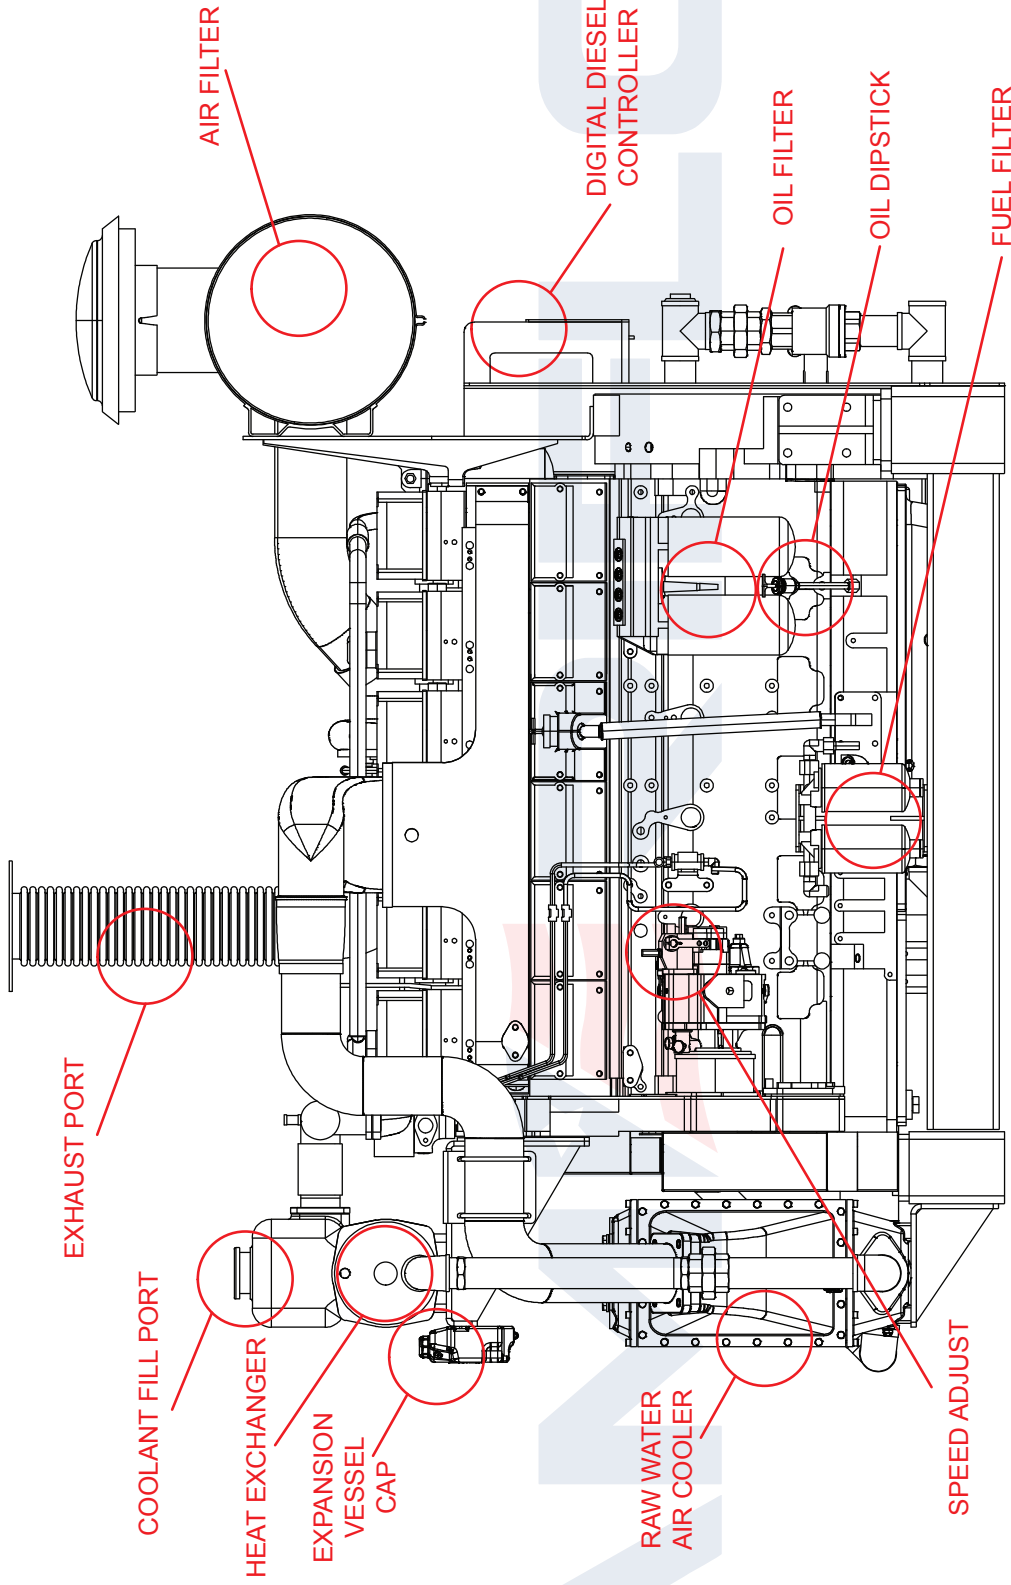

NOTES:

1. ALL PLUMBING MUST BE SUPPORTED AND/OR ISOLATED SO THAT NO WEIGHT OR STRESS IS APPLIED TO ANY ENGINE COMPONENT.
2. REFER TO SPECIFIC MODELS' INSTALLATION, OPERATION & MAINTENANCE MANUAL FOR INSTALLATION GUIDELINES.

REV	UNITS	PROJECT	SCALE	PAGE	OF
	IN (MM)		NONE	1	1
		PROJECT:			
		PROJECT:			
		NAME: INSTALLATION DRAWING DIESEL FIRE PUMP DRIVER MODEL AF6-159B			
		DATE: 09/01/2020			
		APPROVED: DATE:			
		CHK BY: MJF			
		DATE: 09/01/2020			
		APVD			
		DWN			
		DESCRIPTION			
A		CREATION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			
		DATE			
		APVD			
		DWN			
		DESCRIPTION			

